

Babies Act of 2016

Public Law No: 114-235 (10/07/2016)

(This measure has not been amended since it passed the House on September 21, 2016. The summary of that version is repeated here.)


Bathrooms Accessible in Every Situation or BABIES Act

(Sec. 2) Within two years (10-7-2018) this bill requires restrooms in a federal public building to be equipped with baby changing facilities that the General Services Administration (GSA) determines are physically safe, sanitary, and appropriate. "Public building" means a public building controlled by the GSA's Public Building Service

Such requirement shall be subject to any reasonable accommodations that may be made for individuals in accordance with the Americans with Disabilities Act.

Such requirement shall be inapplicable:

- to a restroom in a public building that is not available or accessible for public use,
- to a restroom that contains clear and conspicuous signage indicating where a restroom with a baby changing table is located on the same floor of such building,
- if new construction would be required to install a baby changing facility in the building and the cost of such construction is unfeasible, or
- to a building not subject to an alteration for which any appropriations must be approved by the Senate Committee on Environment and Public Works and the House Committee on Transportation and Infrastructure.



<https://www.bradleycorp.com/accessories/commercial/child-care-solutions>

<https://www.ejdwyer.com>

**E.J. Dwyer Co.
240-553-0112**



964-000000

Toddler Wall Seat

- ✓ Surface-Mounted
- ✓ ADA compliant – opens with less than 5 lbs. of force, projects less than 4" from the wall when closed
- ✓ Model 964 – Gray **Bradex**®

Product Materials

Bacterial resistant high density polyethylene with steel to steel support hinges. Pneumatic gas shock mechanism opens and closes unit smoothly. ADA compliant nylon buckle is adjustable with one hand.

STRENGTH NOTE: Unit to be able to support a static load of up to 50 lbs.

Installation

Verify all rough-in dimensions prior to installation. Secure to wall through mounting holes. Mounting hardware for typical conditions is included.

WARNING The installer is responsible for confirming the wall construction, anchors and fasteners are in good condition and capable of withstanding 200 pounds pull out force or greater. Contact the building architect or engineer for confirmation when in doubt.

WARNING: Be sure to use reinforced backing behind wall where mounting screws or anchoring devices are installed to ensure adequate support for the toddler wall seat. All anchoring devices must be appropriate for specific wall construction. Severe personal injury and/or property damage may result from improper mounting.


Guide Specification

Surface-mounted toddler wall seat shall be gray colored (964) molded bacterial-resistant, high density polyethylene. Steel to steel support hinges with pneumatic gas shock mechanism. Unit shall have an anti-microbial safety belt. Warning labels are printed in English, Spanish, French and Braille. Unit shall be operable with less than 5 lbs. of force.

Overall dimensions:

Closed: 12"W x 15-1/5"H x 4"D

Open: 12"W x 15-1/2"H x 13-1/2"D

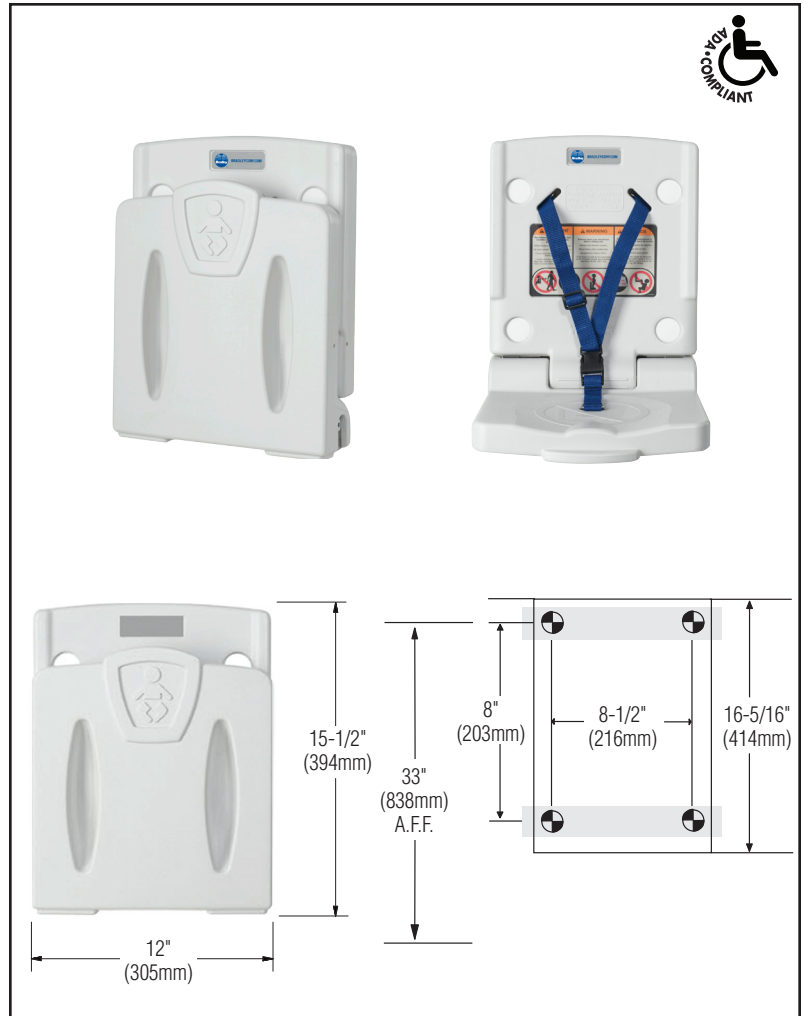

ADA Compliant

- ✓ Consult local and national accessibility codes for proper installation guidelines.
- ✓ Conformity and compliance to local and national codes is the responsibility of the installer.

Service Parts Available

Part Number	Description
P15-495	Replacement Strap

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1

5/31/2017

This information is subject to change without notice.
Bradley_ToddlerSeat_964

© 2017 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



963, 9631, 9632

Baby Changing Station

- ✓ Surface-Mounted
- ✓ ADA compliant – opens with less than 5 lbs. of force, projects less than 4" from the wall when closed
- ✓ Model 963 – Gray and White Speckled **Bradex**®
- ✓ Model 9631 – Light Grey **Bradex**®
- ✓ Model 9632 – Cream **Bradex**®

Product Materials

Bacterial resistant high density polyethylene with steel to steel support hinges. Pneumatic gas shock mechanism opens and closes unit smoothly. Liner dispenser and purse.diaper bag hooks molded in. ADA compliant nylon buckle is adjustable with one hand.

STRENGTH NOTE: Unit complies with ASTM F2285 Standard that requires commercial diaper changing stations be able to support a static load of up to 250 lbs.

Installation


Verify all rough-in dimensions prior to installation. Secure to wall through mounting holes. Mounting hardware for typical conditions is included.

WARNING: Be sure to use reinforced backing behind wall where mounting screws or anchoring devices are installed to ensure adequate support for the baby changing station. All anchoring devices must be appropriate for specific wall construction. Severe personal injury and/or property damage may result from improper mounting.

Guide Specification

Surface-mounted baby changing station shall be gray and white speckled (963), solid light grey (9631) or cream colored (9632) molded bacterial-resistant, high density polyethylene. Steel to steel support hinges with pneumatic gas shock mechanism. Unit shall have integrated liner dispenser and bag hooks. Unit shall have an anti-microbial safety belt. Warning labels are printed in English, Spanish, French and Braille. Unit shall be operable with less than 5 lbs. of force and complies with ASTM F2285 Standard.

Overall dimensions: 34-1/4"W x 15-3/8"H x 4"D.

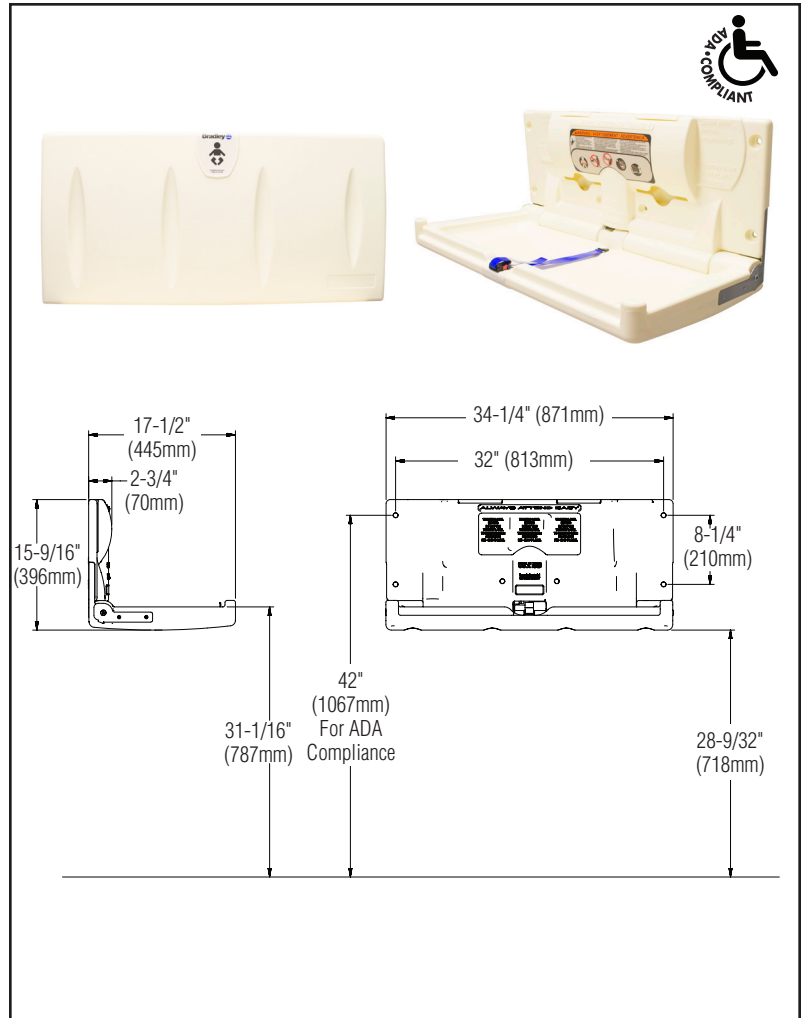

ADA Compliant

- ✓ Consult local and national accessibility codes for proper installation guidelines.
- ✓ Conformity and compliance to local and national codes is the responsibility of the installer.

Service Parts Available

Part Number	Description
P15-491	Replacement Strap

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.

Page 1 of 1
This information is subject to change without notice.
Bradley_BabyChanger_963_31_32

4/10/2017

© 2017 Bradley
P.O. Box 309, Menomonee Falls, WI 53052-0309
800 BRADLEY (800 272 3539) +1 262 251 6000
bradleycorp.com



- ✓ Model 962 – Recess-Mounted **Bradex**®
- ✓ Model 962-11 – Surface-Mounted **Bradex**®
- ✓ Meets relevant sections of the CPSIA to the extent possible.
- ✓ Meets or exceeds ASTM F2285 Safety Specification for Commercial Changing Stations.

Product Materials

BODY: bacterial-resistant polyethylene with brushed 20 gauge stainless steel exterior. Rated to support static load of 250 lbs, tested to 390 lbs. Pneumatic gas shock mechanism to ensure smooth, safe open and close motions. Black corner guards for added protection.

MOLDED DUAL LINER DISPENSER: holds approx. 50 per dispenser (liners sold separately).

SAFETY BELT: with cam-buckle, adjustable with one hand.


WARNING: Be sure to use reinforced backing behind wall where mounting screws or anchoring devices are installed to ensure adequate support for the baby changing station. All anchoring devices (supplied by installer) must be appropriate for specific wall construction. Severe personal injury and/or property damage may result from improper mounting.

ADA Compliant

- ✓ Consult local and national accessibility codes for proper installation guidelines.
- ✓ Conformity and compliance to local and national codes is the responsibility of the installer.

Service Parts Available

Part Number	Description
P11-021	Liners (100% bio-degradable), Case of 500
P15-491	Replacement Strap

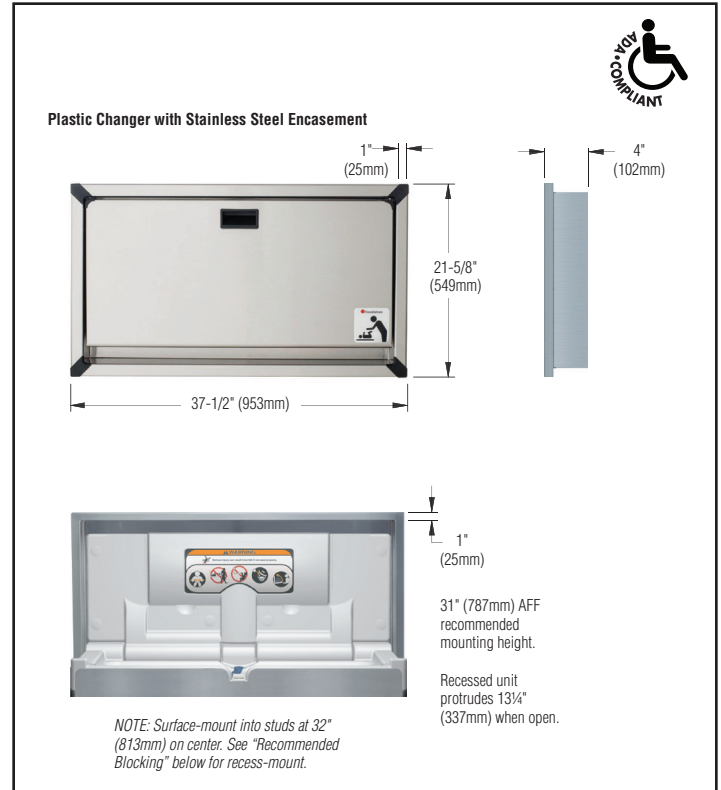

Orders composed of products indicated as **Bradex**® will be available to ship in three days after receipt of order at the factory. There is no pricing penalty for this service from Bradley.